


# SPIN LITE

m<sup>2</sup> 0.015  
 495x220x140mm 1 Pcs  
 70 pcs

**Corpo, cornice e vano ottico:** pressofusione di alluminio.  
**Verniciatura:** polvere di poliestere termoidurente, previo trattamento di sgrassaggio e fosfocromatazione in grado di garantire un'altissima resistenza agli agenti chimici ed atmosferici; finitura satinata.  
**LED:** Osram Prevalad Coin111 AC, CRI>80, CCT 3000/4000K  
**Durata utile:** 50.000h L70 B50 @ta25; 35.000h L70 B50 @tamax.  
**Alimentazione:** 220-240V 50/60Hz elettronica, tensione diretta.  
**Adattatore trifase:** tecnologia Nokia, fornito di serie, già montato sul prodotto.




Dettaglio adattatore trifase  
 3 phase adapter detail

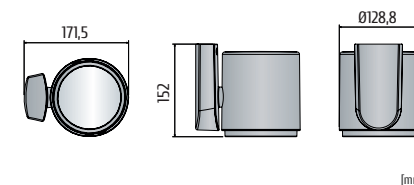

[mm]

CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	APERTURA FASCIO Beam angle(°)	COLORE LED Beam colour(K)	PESO NETTO Net weight(kg)
416643.120	LED	22,5W	1900	1900	40	3000	1,68
416643.121	LED	22,5W	1900	1900	40	4000	1,68
416643.115	LED	15W	1200	1200	40	3000	1,68
416643.116	LED	15W	1200	1200	40	4000	1,68

**Housing, frame and optical compartment:** die-cast aluminium.  
**Paintwork:** thermosetting polyester powder, prior degreasing and phosphochromatizing process that will ensure an extremely high resistance to chemical and atmospheric agents; satin finished.  
**LED:** Osram Prevalad Coin111 AC, CRI>80, CCT 3000/4000K.  
**Expected lifetime:** 50.000h L70 B50 @ta25; 35.000h L70 B50 @tamax.  
**Power supply:** 220/240V 50/60Hz with electronic ballast, direct mains.  
**3 phase adapter:** with Nokia technology, standard supplied, already mounted.



Spin LITE 22W 1800lm

COLORI DISPONIBILI Available colors  
 Argento RAL 9006 RAL 9006 Silver

3

IP40



ta 25 +40

3 YEARS WARRANTY

PROIETTORI PER INTERNI  
 INDOOR FLOODLIGHTS