

15W LED Downlight - Pro, 840, With Driver

Order Code: DWL071

Photometric Data

Colour Rendering Index (CRI)	80-89
Lumens	1800
LPW (lm/W)	120
Colour Temperature (K)	4000 - 4000
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	15
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
Non-dimmable	Yes

Physical Data

Surface Protection	Powder Coating
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Cut-out height	60
Cut-out diameter	200
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

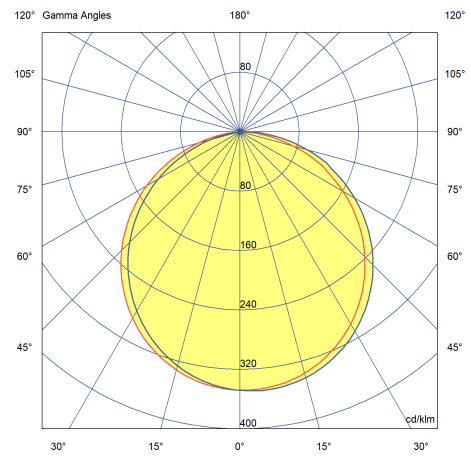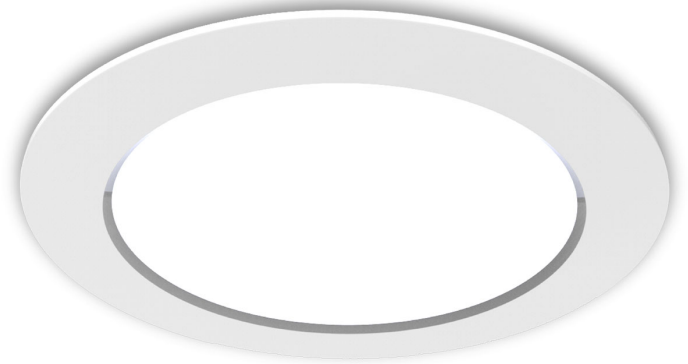

15W LED Downlight - Pro, 840, With Driver



Order Code: DWL071

Environmental Data

Ambient Rated Temperature Range (°C)	-10 to 35
--------------------------------------	-----------

Accessories

EMG013 - Emergency Downlight

EMG018 - Remote Emergency Pack

15W LED Downlight - Pro, 840, With DALI Driver

Order Code: DWL071-KIT02

Photometric Data

Colour Rendering Index (CRI)	80-89
Lumens	1800
LPW (lm/W)	120
Colour Temperature (K)	4000 - 4000
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	15
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
1-10V Dimming	Yes
DALI Dimming	Yes

Physical Data

Surface Protection	Powder Coating
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Cut-out height	60
Cut-out diameter	200
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

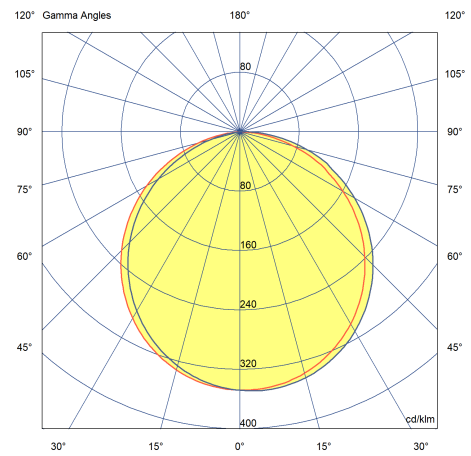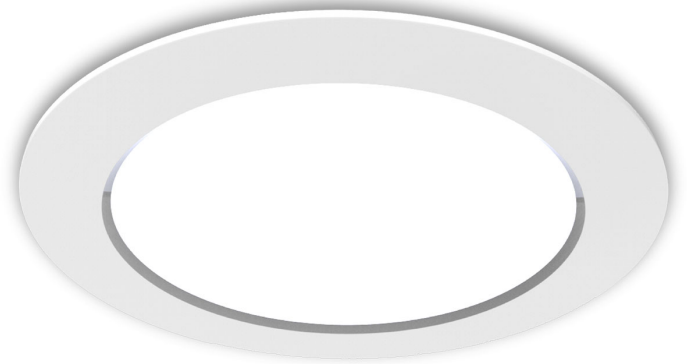

15W LED Downlight - Pro, 840, With DALI Driver



Order Code: DWL071-KIT02

Environmental Data

Ambient Rated Temperature Range (°C)	-10 to 35
--------------------------------------	-----------

Accessories

EMG013 - Emergency Downlight

EMG018 - Remote Emergency Pack

15W LED Downlight - Pro, 840, With Driver + Emergency

Order Code: DWL071-KIT03

Photometric Data

Colour Rendering Index (CRI)	80-89
Lumens	1800
LPW (lm/W)	120
Colour Temperature (K)	4000 - 4000
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	15
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
Non-dimmable	Yes

Physical Data

Surface Protection	Powder Coating
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Cut-out height	60
Cut-out diameter	200
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

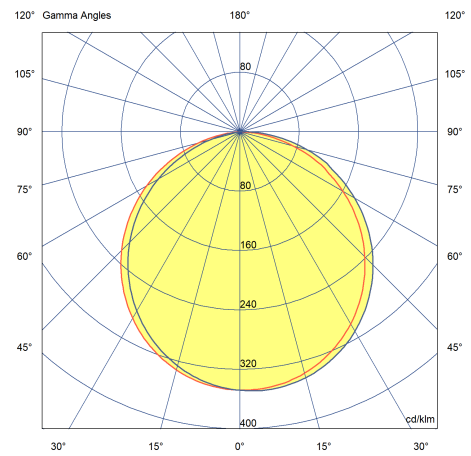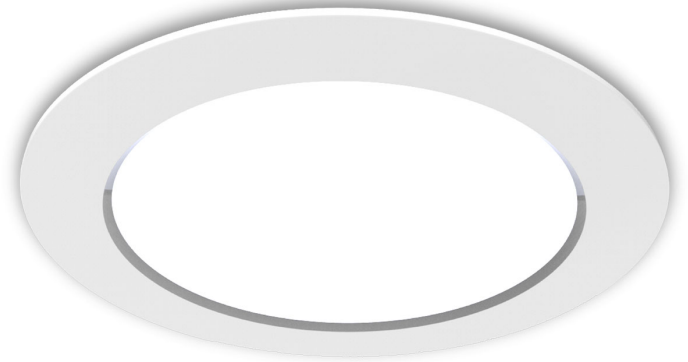

15W LED Downlight - Pro, 840, With Driver + Emergency



Order Code: DWL071-KIT03

Environmental Data

Ambient Rated Temperature Range (°C) 0 to 35

Accessories

EMG013 - Emergency Downlight

EMG018 - Remote Emergency Pack

15W LED Downlight - Pro, 840, With DALI Driver + Emergency

Order Code: DWL071-KIT04

Photometric Data

Colour Rendering Index (CRI)	80-89
Lumens	1800
LPW (lm/W)	120
Colour Temperature (K)	4000 - 4000
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	15
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
1-10V Dimming	Yes
DALI Dimming	Yes

Physical Data

Surface Protection	Powder Coating
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Cut-out height	60
Cut-out diameter	200
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

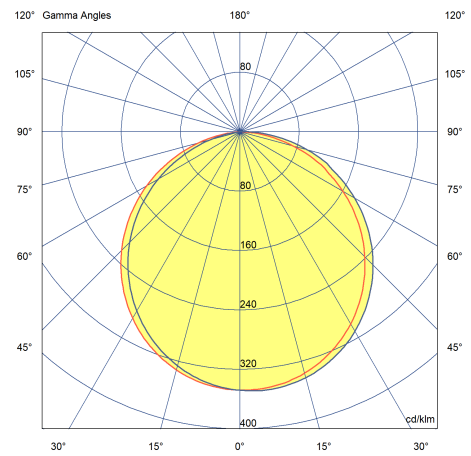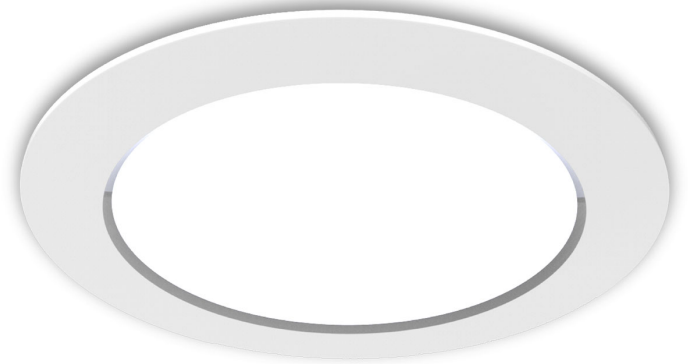

15W LED Downlight - Pro, 840, With DALI Driver + Emergency



Order Code: DWL071-KIT04

Environmental Data

Ambient Rated Temperature Range (°C) 0 to 35

Accessories

EMG013 - Emergency Downlight

EMG018 - Remote Emergency Pack