






TEST REPORT IEC TR 62778 Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires	
Report Number.....	402586-1TRFPHO
Date of issue.....	2020-07-31
Total number of pages	12
Name of Testing Laboratory preparing the Report	Nemko Spa Via del Carroccio, 4 - 20853 Biassono (MB) – ITALY
Applicant's name	C Luce Srl
Address.....	Via Marmolada 5/11 – 20060 Trucazzano (MI) – ITALY
Test specification:	
Standard.....	IEC TR 62778:2014 (Second Edition)
Test procedure	Testing
Non-standard test method	N/A
Test Report Form No.	IEC62778A
Test Report Form(s) Originator	TÜV SÜD Product Service GmbH
Master TRF	Dated 2016-02
Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	LED floodlight	
Trade Mark :	 C Luce ()	
Manufacturer	C Luce Srl	
Model/Type reference :	MATCH 251643.384	
Ratings :	960 W 220-240 V ~ 50-60 Hz 850 mA 4000 K	
s/n of model tested :	402586 1/1 identified by Nemko Spa	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	Testing Laboratory:	
Testing location/ address		Nemko Spa Via del Carroccio, 4 – 20853 Biassono (MB) – Italy
<input type="checkbox"/>	Associated Testing Laboratory:	
Testing location/ address		
Tested by (name, function, signature) :		Oscar Segantin (Project handler) 
Approved by (name, function, signature) .. :		Kelly Ye (Verifier) 
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address		
Tested by (name, function, signature) :		
Approved by (name, function, signature) .. :		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address		
Tested by (name + signature) :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address		
Tested by (name, function, signature) :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
Supervised by (name, function, signature) :		

<p>List of Attachments (including a total number of pages in each attachment):</p> <ul style="list-style-type: none"> - Attachment 1: Best Measurement Capability (1 page) - Attachment 2: Characteristics of lamps (1 page) - Attachment 3: Photo documentation (2 pages) - Attachment 4: Equipment used for testing (1 page) 	
<p>Summary of testing: The equipment under test is a streetlight LED. The tests were performed with the following settings: 1- Distance of 200mm (IEC_62778)</p>	
<p>Tests performed (name of test and test clause): Cl. 8 – Risk Group classification</p> <p>Note: The following Nemko technical procedures were also applied during testing:</p> <ul style="list-style-type: none"> - WML0177 General routines for using instruments at Nemko. - WML1002: Measurement Uncertainty – Policy and Statement. - WML0066: Procedure for measurement of Photobiological safety of lamps and lamp systems <p>Statement of the measurement uncertainty: See Attachment 1 for Measurement Uncertainty</p> <p>Unless different values are declared in the test case, following ambient conditions apply for the tests:</p> <ul style="list-style-type: none"> - Ambient temperature 18-33 °C - Relative Humidity 30-70 % - Atmospheric Pressure 860-1060 hPa <p>Equipment used for testing is recorded and saved into Attachment 4 to this test report.</p>	<p>Testing location:</p> <p>Nemko Spa Via del Carroccio, 4 – 20853 Biassono (MB) – ITALY (for all tests)</p>
<p>Summary of compliance with National Differences (List of countries addressed):</p> <ul style="list-style-type: none"> - All CENELEC member countries (no deviation listed on IECEE website) 	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

NOT PROVIDED

Calibration	All instruments used in the tests given in this test report are calibrated and traceable to national or international standards. Further information about traceability will be given on request.
Measurement uncertainty	The measurement uncertainty was calculated for each test and quantity listed in this test report, according to IEC Guide 115 and other specific test standard and is documented in Nemko Spa working manual WML1002.
Assessment of conformity	The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report: P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit. F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Test item particulars	: LED floodlight
Product evaluated	: <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire
Rated voltage (V)	: 220-240 V
Rated current (mA)	: 850 mA
Rated CCT (K)	: 4000 K
Rated Luminance (Mcd/m²)	: -
Component report data used	: <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp Report number: -
Possible test case verdicts:	
- test case does not apply to the test object.....	: N/A (Not applicated)
- test object does meet the requirement.....	: P (Pass)
- test object does not meet the requirement.....	: F (Fail)
Testing	
Date of receipt of test item	: 2020-07-20
Date (s) of performance of tests	: 2020-07-29
General remarks:	
<p>"The phase of sampling / collection of equipment under test is carried out by the customer." "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. The phase of sampling/collection is carried out by manufacturer. Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p>	
Name and address of factory (ies)	: C Luce Srl Via Marmolada 5/11 – 20060 Trucazzano (MI) – ITALY
General product information:	
<p>The equipment under test is a LEDfloodlight for general purpose, composed by:</p> <ul style="list-style-type: none"> - 8 LED modules (each module consists of 48 LED packages and a plastic lens array providing symmetric light beam of 15° (see attachment 4 for further characteristics of the LED packages); - 4 controlgear model XLG-240-L-A manufactured by MEAN WELL with ratings: Input: 2,7 A 100-240 V 50/60 Hz Output: 239,4 W 370 Vmax <p>Light emitting area: 1050x410 mm</p> <p>s/n: 402586 1/1 identified by Nemko Spa</p>	

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		P
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		P
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011 rad field of view)		P
	Non-standard condition applied		N/A
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as : <input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited		N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	- .. Risk Group 0 unlimited		N/A
	- .. Risk Group 1 unlimited		N/A
	- E_{thr} (lx) : Distance to reach RG1 (m) :	2010 24	P

TABLE: Spectroradiometric measurement					P
Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
Model number.....:		402586 1/1 (assigned by Nemko Spa)			
Test voltage (V)		230 V			—
Test current (mA)		-			—
Test frequency (Hz).....:		50 Hz			—
Ambient, t (°C).....:		26			—
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			—
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm			—
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			—
Item	Symbol	Units	Result	Remark	
Correlated colour temperature	CCT	K	N/A	See component datasheet	
x/y colour coordinates			N/A	See component datasheet	
Blue light hazard radiance	LB	W/(mv•sr1)	2,51E06	RG2	
Blue light hazard irradiance	EB	W/m ²	N/A		
Luminance	L	cd/m ²	5,04E09		
Illuminance	E	lx	N/A		
Supplementary information:					

ATTACHMENT 1: MEASUREMENT UNCERTAINTY


Test	Range	Measurement Uncertainty	Note
Radiance Blue light, Retinal thermal, Retinal thermal weak visual stimulus	0 ÷ 0.1 MW/(sr·m ²) 300 ÷ 1400 nm	7.0 %	(1)
	0.1 ÷ 100 MW/(sr·m ²) 300 ÷ 1400 nm	8.0 %	(4)
Luminance	0 ÷ 0.1 Mcd/m ²	7.0 %	(1)
	0.1 ÷ 100 Mcd/m ²	8.0 %	
Irradiance Actinic UV, Near UV, Blue light small source, IR radiation, eye	0 ÷ 0.1 MW/(m ²) 200 ÷ 300 nm	9.2 %	(1) (5)
	0.1 ÷ 100 MW/(m ²) 200 ÷ 300 nm	10.0 %	
	0 ÷ 0.1 MW/(m ²) 300 ÷ 3000 nm	6.4 %	
	0.1 ÷ 100 MW/(m ²) 300 ÷ 3000 nm	7.2 %	
Illuminance	0 ÷ 20 klx	4.0 %	(1)
Spectral Radiance	0 ÷ 0.1 MW/(sr·m ² ·nm) 300 ÷ 1400 nm	6.2 %	(1)
	0.1 ÷ 1 MW/(sr·m ² ·nm) 300 ÷ 1400 nm	7.0 %	
Spectral Irradiance	0 ÷ 0.1 MW/(m ² ·nm) 200 ÷ 300 nm	8.6 %	(1)
	0.1 ÷ 1 MW/(m ² ·nm) 200 ÷ 300 nm	9.2 %	
	0-0.1 MW/(m ² ·nm) 300 ÷ 3000nm	5.4 %	
	0.1 ÷ 1 MW/(m ² ·nm) 300 ÷ 3000 nm	6.4 %	
Radiant power Laser radiation Output power	350 ÷ 400 nm 950 ÷ 3000 nm 30 uW ÷ 30 W	9.0 %	(1), (2), (3)
	400 ÷ 950 nm 50 nW ÷ 3 W	4.6 %	(1), (2), (3)
Radiant energy Laser radiation	350 ÷ 400 nm 950 ÷ 3000 nm 20 uJ ÷ 2 J	9.0 %	(1), (2)
	400 ÷ 950 nm 20 uJ ÷ 2 J	4.6 %	(1), (2)
Wavelength	200 ÷ 3000 nm	4.5 %	(1)
Length in optical measurement	0 ÷ 20 mm	0.5 mm	(1)
	20 ÷ 200 mm	2 mm	
	0.2 ÷ 200 m	0.5 %	

NOTES:

- (1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$, which for a normal distribution corresponds to a coverage probability of approximately 95 %
- (2) In the standard 60825-1 laser radiation can indicate radiant power or radiant energy
- (3) In the standard 60825-1 the radiant power can be called also output power
- (4) The uncertainty value expressed in $W/(m^2)$ is the maximum value between the value measured and the limit stated in the standard (see IEC/EN62471) multiplied to the measurement uncertainty stated in the table
- (5) The uncertainty value expressed in $W/(sr \cdot m^2)$ is the maximum value between the value measured and the limit stated in the standard (see IEC/EN62471) multiplied to the measurement uncertainty stated in the table

ATTACHMENT 2: CHARACTERISTICS OF LAMP

Application / Function	Manufacturer trademark	Type / Model	Technical data	Standard	Mark(s) of conformity evidence of acceptance
LEDs	SAMSUNG	LH351C	4000 K 70 CRI V _F 3,18 V _{max} at I _F 2000 mA 685 lm	IEC 62778	Tested in appliance

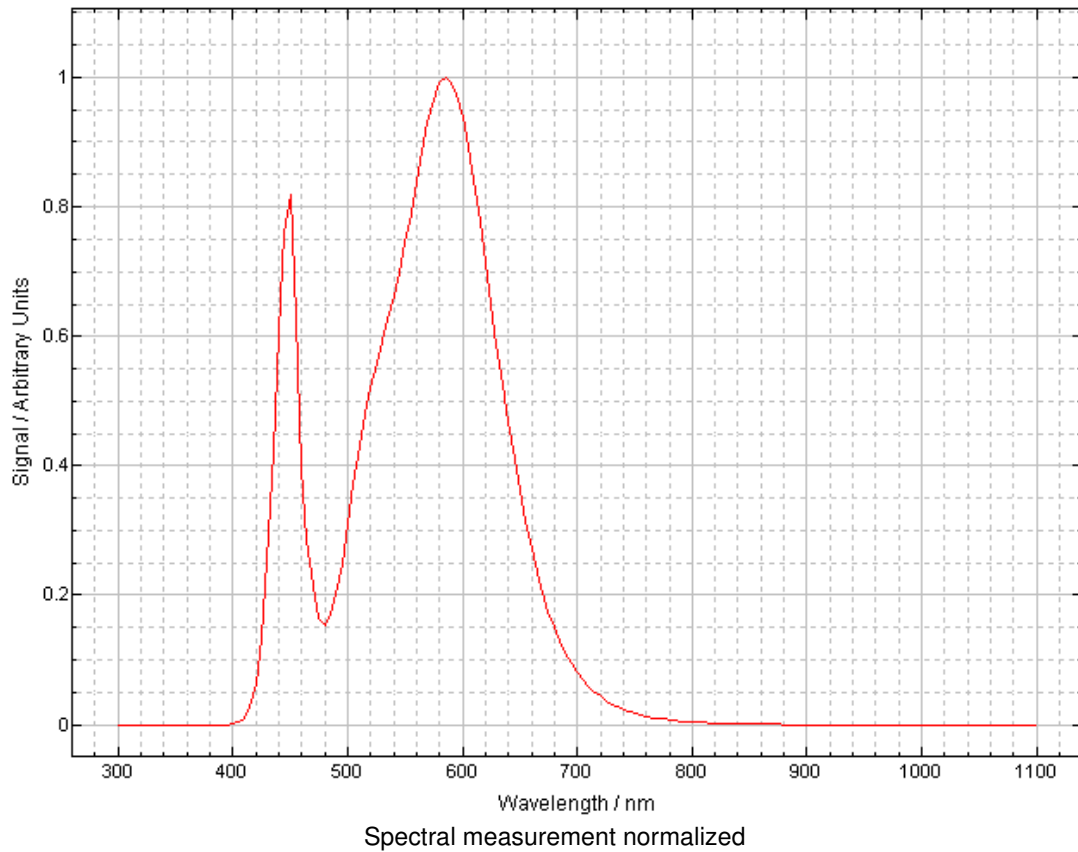


ATTACHMENT 3: PHOTO DOCUMENTATION



a)



b)

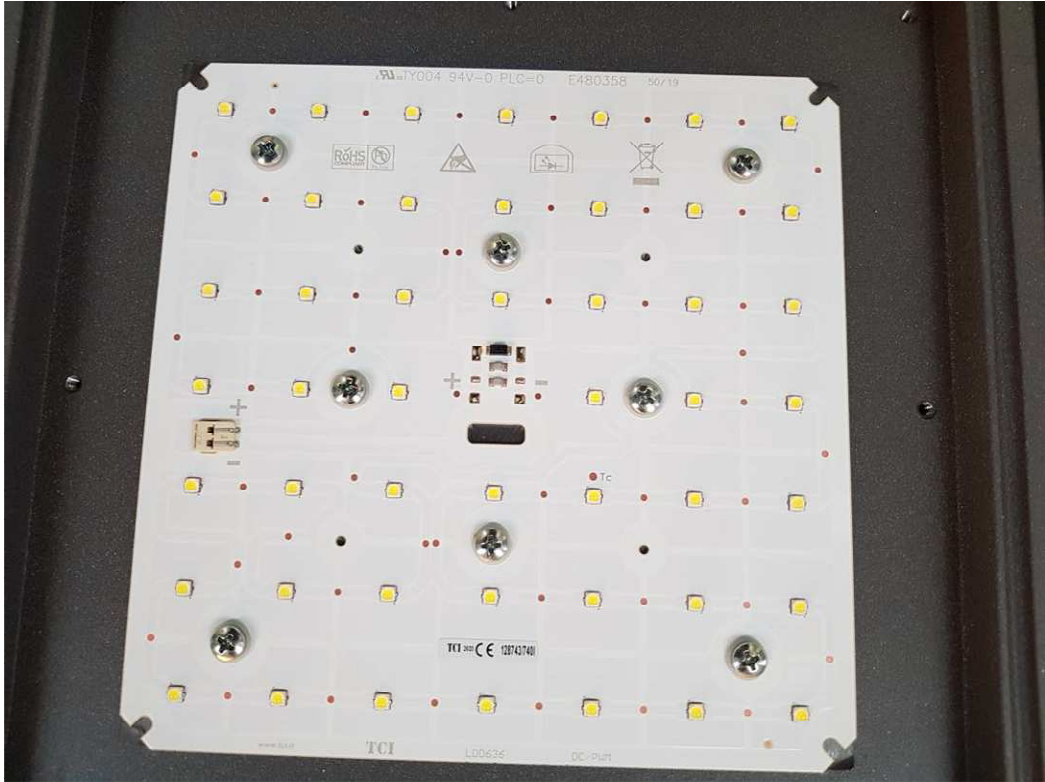

c)



d)



From a) to e) General view of the equipment

ATTACHMENT 4: EQUIPMENT USED FOR TESTING

MEASUREMENT EQUIPMENT			
Manufacturer	Type of equipment	Type designation	Serial number
Bentham instruments	Double monochromator	IDR300	12290
	Calibration lamp for irradiance measurement	CL6-H	12094/5
	Calibration lamp for irradiance measurements (UV)	CL7	12281/3
	Calibration lamp for radiance measurements	SRS12	12283/3
	Telescope for radiance measurements	TEL309	12280/3
	Illuminance detector	DH400_vl	12284/3
	Power supply	PSU605	12236/4
	Power supply	PSU705	12295
	Diffuser	DIFF_D7	12279/3
	Source Profiler	PSL_Profiler	12698/4
Other instruments	Tape	Stanley 8 m	30-457
	Distance meter	Bosch DLE70	005558860
	Multimeter	Fluke 8846	9673012
	Power supply	Philips	003926
	Data logger	Testo 176P1+0572 6174	41002029+206 38516
	Data logger	Testo 184H1	44220017

END OF TEST REPORT